



SPECIAL

CCPLS52-4A-00

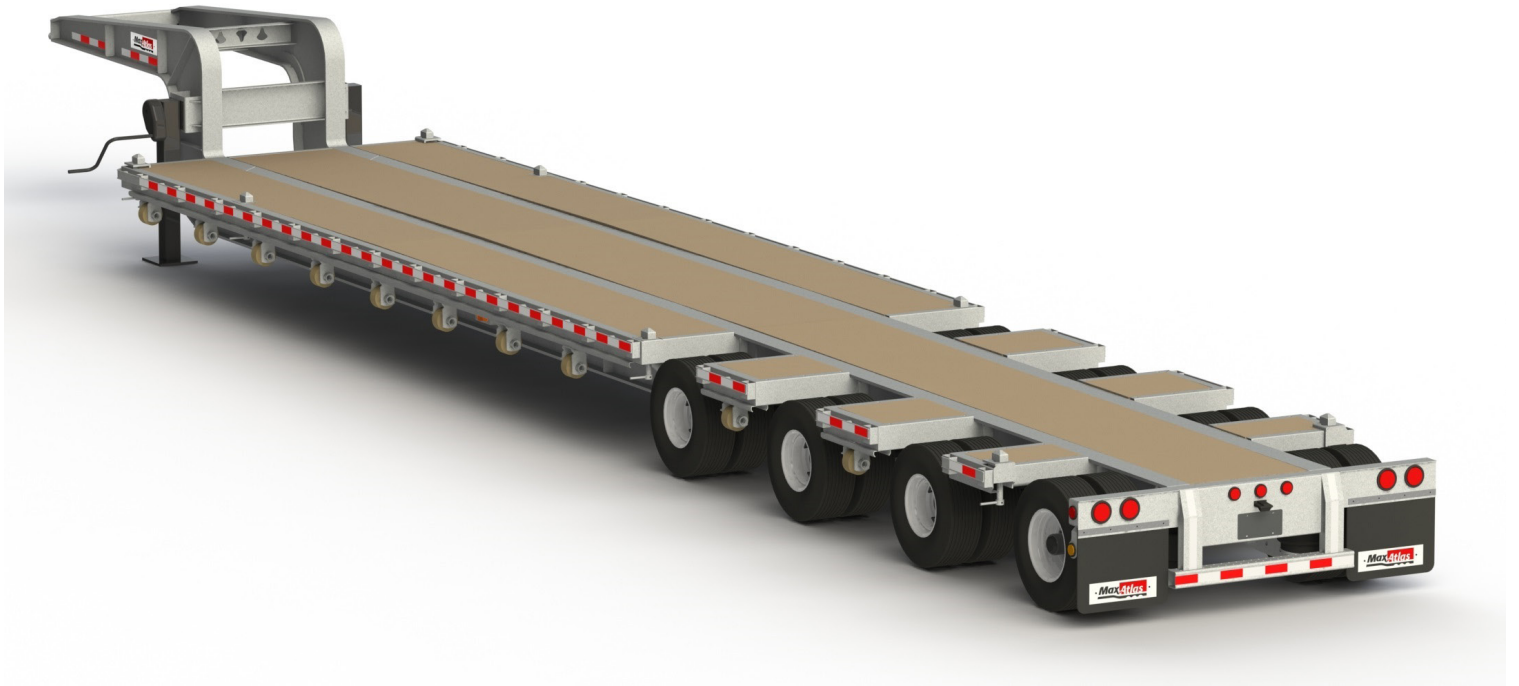

ENGINEERED TO PERFORM

max-atlas.com

SPECIAL

CCPLS52-4A-00

Step deck 51' combination container chassis and platform designed to carry 20' and 40' ISO container and general freight.
"Engineered to Perform"



20' POSITION



40' POSITION

STANDARD SPECIFICATION

DIMENSIONS

OVERALL CHASSIS LENGTH 51' 2 3/4"
OVERALL CHASSIS WIDTH 102"
MAXIMUM REAR HEIGHT 29"

TARE WEIGHT

TARE WEIGHT (KG) +/- 2% 7,270 kg
TARE WEIGHT (LB) +/- 2% 16,027 lb
GVWR USA 70,000 lb • CAN 90,000 lb
GCVWR USA 80,000 lb • CAN Consult with your sales representative

LANDING GEAR

CAN Two speed AAR approved, square leg tubing with 10" x 11 1/2" low profile sand shoes. Lift capacity: 62,500 lb, ultimate load capacity 200,000 lb. Road side handle.

USA Two speed AAR approved, square leg tubing with 10" x 10" low profile sand shoes. Lift capacity: 55,000 lb, ultimate load capacity 160,000 lb. Road side handle.

STRUCTURE

MAIN BEAMS Deep fabricated I-Beam with 80,000 psi and 130,000 psi material for top and bottom flanges and web.

CROSS MEMBER All crossmembers are formed from 7 gauge steel.

UPPER COUPLER ASSEMBLY Pickup plate is 5/16" hi tensile steel, AAR approved king pin with an 12" location, reinforced fore and aft by formed channels.

FRONT BOLSTER Tubing HSS 5" x 5", 96" wide.

CENTER BOLSTER Tubing HSS 5" x 5", 96" wide.

REAR BOLSTER Tubing HSS 5" x 5", 96" wide.

REAR IMPACT GUARD Designed and tested to meet Federal regulations.

RUNNING GEAR

SUSPENSION Air ride four axle fixed suspension.

AXLES

AXLES QUANTITY 4
AXLE DESCRIPTION 5" round diameter, 77 1/2" track, 1/2" wall with 22,500 lb capacity.
AXLE SPREAD 60".

BRAKES

DRUM & HUB 10 stud steel hub piloted hubs, outboard mounted cast steel drums.
BRAKE 16.5" x 7" non asbestos lining.
LUBRIFICATION Oil or synthetic grease.
BRAKE SYSTEM TYPE 2S/1M, 30/30 brake chambers, automatic slack adjusters.

WHEELS

RIMS Steel 7,50 in. X 22.5 in. hub piloted tubeless.
RIMS COLOUR White.

TIRES

TIRES SIZES 7.5R17.5, 14 ply.
TIRE INFLATION SYSTEM Optional.

ELECTRICAL

LIGHTING

WIRES Fully sealed and certified, meets all FMVSS and CMVSS regulations.

LAMPS Flange mounted, LED.

GENERAL SPECS

CONSPICUITY TAPE "Conspicuity marking per latest Federal Safety Standards".

FASTENERS All structural fasteners are Grade 5 or better and are zinc coated.

CONTAINER LOCKS Eight (8) retractable twist locks.

FLOOR Wood flooring.

DOCUMENT HOLDER Plastic with pressure fit see through cover lens.

MUD FLAPS Two (2) Max-Atlas anti-sail 24" x 24" black rubber mud flaps.

LETTERING Optional.

FINISH

METAL PREPARATION Clean, dry steel and NACE No. 3 /SSPC-SP-6 "Commercial Blast Cleaning".

PRIMER Rich epoxy primer.

TOPCOAT Polyurethane top coat.

PREMIUM PRIMER OPTIONAL RI epoxy primer 10 year warranty.



max-atlas.com

MAX-ATLAS EQUIPEMENT INTERNATIONAL INC.

371, chemin Grand-Bernier Nord
Saint-Jean-sur-Richelieu (Québec) CANADA
T 450 346-8848 • 1 888 966-8848 (TOLL FREE)
F 450 358-5077

ENGINEERED
TO PERFORM