


# DROP DECK CHASSIS

CCS32-3A-00




ENGINEERED TO PERFORM

[max-atlas.com](http://max-atlas.com)

# DROP DECK CHASSIS

CCS32-3A-00

Max-Atlas 32' drop frame chassis carries one loaded 20' ISO container with three (3) axles air ride suspension for a smooth ride. The low rear height allows the transport of high cube containers safely under bridges, overpasses. A great unit to have in your fleet. It meets all D.O.T. regulations

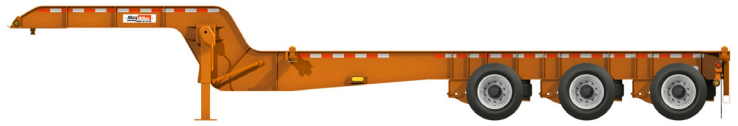

STANDARD POSITION 20'

## STANDARD SPECIFICATIONS

### DIMENSIONS

**OVERALL CHASSIS LENGTH** 32' 6"

**OVERALL CHASSIS WIDTH** 102"

**MAXIMUM REAR HEIGHT** 36"

### TARE WEIGHT

**TARE WEIGHT (KG) +/- 2%** 3,860kg

**TARE WEIGHT (LB) +/- 2%** 8,510lb

**GVWR** USA 65,000lb • CAN 85,000lb

**GCVWR** USA 80,000lb • CAN Consult with your sales representative

### LANDING GEAR

**CAN** Two speed AAR approved, square leg tubing with 10" x 11 1/2" low profile sand shoes. Lift capacity: 62,500lb, ultimate load capacity 200,000lb. Road side handle.

**USA** Two speed AAR approved, square leg tubing with 10" x 10" low profile sand shoes. Lift capacity: 55,000lb, ultimate load capacity 160,000lb. Road side handle.

### STRUCTURE

**MAIN BEAMS** Deep fabricated I-Beam with 80,000 psi, 100,000 psi and 130,000 psi material for top and bottom flanges and web.

**CROSS MEMBER** All crossmembers are formed from 7 gauge steel.

**UPPER COUPLER ASSEMBLY** Pickup plate is 5/16" high-tensile steel, AAR approved king pin with an 18" location, reinforced fore and aft by formed channels.

**FRONT BOLSTER** Fabricated front sill, 96" wide with a tapered rear full web at 45 degrees as a coupling guide. Fully recessed to protect gladhands and electrical plug.

**REAR BOLSTER** HSS tubing 8" x 6", 96" wide.

**REAR IMPACT GUARD** Designed and tested to meet Federal regulations.

### RUNNING GEAR

**SUSPENSION** Fixed tridem air ride suspension.

**AXLES QUANTITY** 3.

**DESCRIPTION** 5" round diameter, 77 1/2" track, 5/8" wall with 25,000lb capacity.

**AXLE SPREAD** 60" (49" and 72" spread available).

### BRAKES

**DRUM & HUB** 10 stud steel hub piloted hubs, outboard mounted cast steel drums.

**BRAKE** 16.5" x 7" non asbestos lining.

**LUBRIFICATION** Oil or synthetic grease.

**BRAKE SYSTEM TYPE** 2S/1M, 30/30 brake chambers, automatic slack adjusters.

### WHEELS

**RIMS** Steel 8.25" x 22.5" hub piloted tubeless.

**RIMS COLOUR** White.

### TIRES

**TIRES SIZES** 11R22.5, 16 ply (14 ply available).

**TIRE INFLATION SYSTEM** Optional.

### ELECTRICAL

#### LIGHTING

**WIRES** Fully sealed and certified, meets all FMVSS and CMVSS regulations.

**LAMPS** Flange mounted, LED.

### GENERAL SPECS

**CONSPICUITY TAPE** "Conspicuity marking per latest Federal Safety Standards".

**FASTENERS** All structural fasteners are Grade 5 or more and are zinc coated.

**CONTAINER LOCKS** Four (4) non-retractable twist locks.

**DOCUMENT HOLDER** Plastic with pressure fit see through cover lens.

**MUD FLAPS** Two (2) Max-Atlas anti-sail 24" x 24" black rubber mud flaps.

**LETTERING** Optional.

### FINISH

**METAL PREPARATION** Clean, dry steel and NACE No. 3 /SSPC-SP-6 "Commercial Blast Cleaning".

**PRIMER** Urethane enriched with zinc. 10 year warranty.

**TOP COAT** Polyurethane top coat.



max-atlas.com

### MAX-ATLAS EQUIPEMENT INTERNATIONAL INC.

371, chemin Grand-Bernier Nord  
Saint-Jean-sur-Richelieu (Québec) CANADA

T 450 346-8848 • 1 888 966-8848 (TOLL FREE)

F 450 358-5077

ENGINEERED  
TO PERFORM